

**EXCELLENT PROTECTION FOR ALL MECHANICAL HAZARDS**

Extremely durable and delivers great resistance to cuts, abrasion, tearing and punctures without compromising dexterity, sensitivity and comfort.

**FEATURES**

- › Cut resistant: Level C (EN 388:2016)
- › Bi-polymer coating ensures excellent grip in wet and dry handling conditions
- › Level 4 resistance (EN 388) for abrasions and rips
- › Anatomically designed for comfort, dexterity and fit
- › Glove retains flexibility despite its high protection levels
- › Machine knitted liner made with High Performance Polyethylene and glass yarn to provide a good cut resistance barrier
- › Sanitized® antimicrobial finish provides extra freshness
- › Elasticated wrist provides a secure fit



**SUITABLE FOR**


**Typical Industries**

- Aerospace
- Automotive
- Ceramics
- Construction
- Engineering
- Glass
- Plastics

**Suitable Applications**

- Bodyshop
- Handling Materials with Sharp Edges
- Injection Moulding
- Metal Fabrication

**CERTIFICATION**

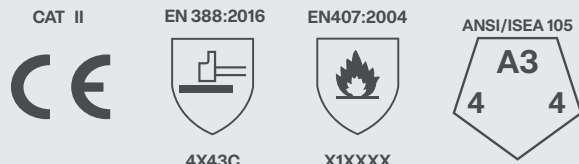

See overleaf for explanation

## PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HPPE, glass fibre, nylon
	COATING:	Bi-polymer
COLOUR	Grey/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY271	10 pairs per pack
8/M	SKY272	
9/L	SKY273	
10/XL	SKY274	
11/XXL	SKY275	120 pairs per case


## RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

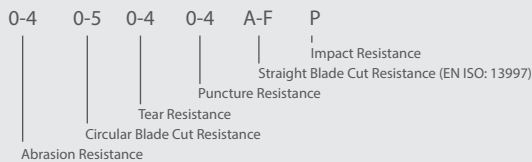

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

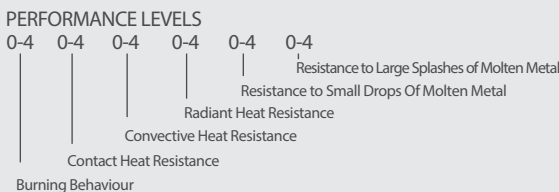

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

## GLOBUS

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

### MIDDLE EAST & AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

### GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

E: [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-NINJA-KN-1123.1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).

UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.